




- Notes
- All dimensions are in millimetres
  - This drawing shall be read in conjunction with Drg. No. SD/1100/1B.
  - All concrete blocks must comply with BS EN 1338.
  - The colour of concrete blocks must be approved by the Director. Red preferred for edge strips.
  - Block paving to be laid in stretcher bond to BS 7533.
  - Width of paved edge strip may be increased to suit other design considerations.
  - Concrete pavements to be constructed in 5000 bays with flexcell joints.
  - Topsoil shall be seeded in accordance with the Specification.
  - Island design must be approved by the Director.
  - Chevron paving may only be used with the approval of the Director.
  - Gradient dependant on design.
  - Chevron pattern to Diagram 515.2 TSRGD 2002.

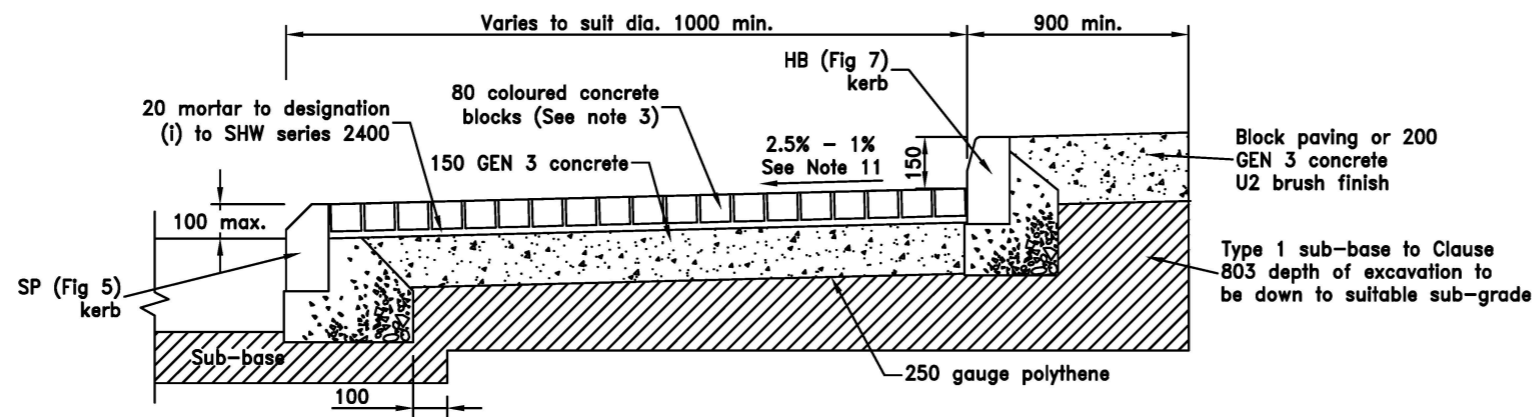


**OVER-RUNNABLE STRIP FOR ISLANDS IN SMALL ROUNDABOUTS - Type 9**

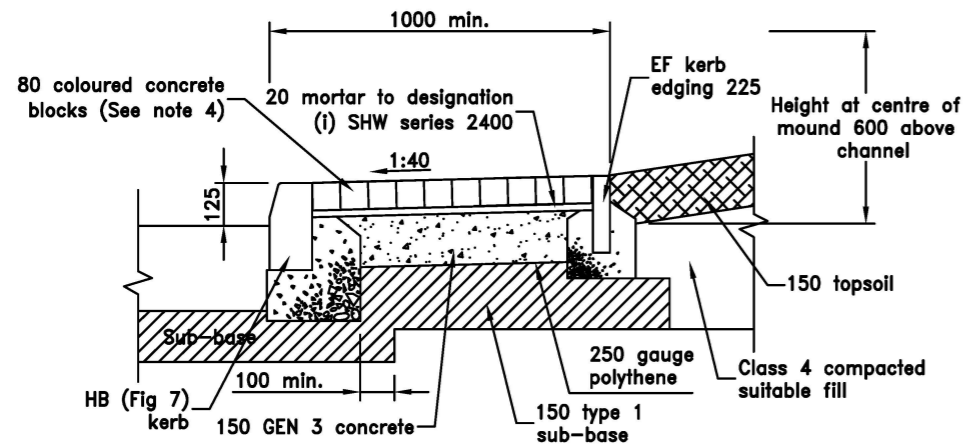

**BLOCK PAVED EDGE STRIP - Type 10**

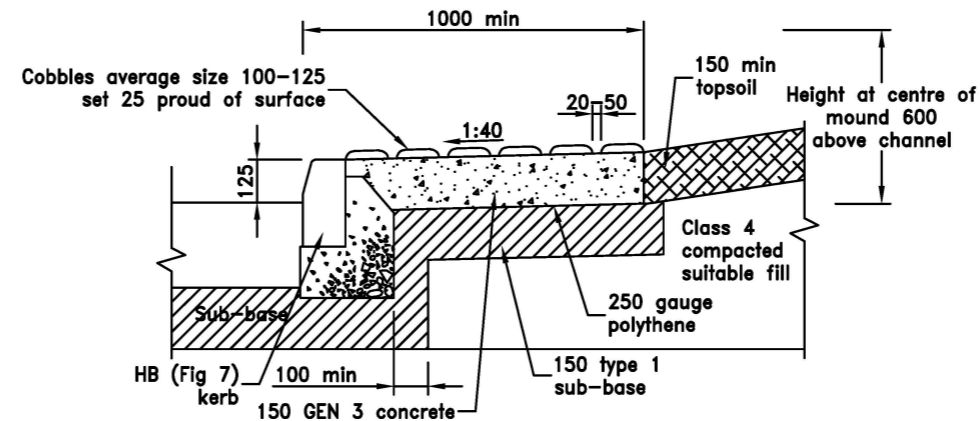


**COBBLED EDGE STRIP - Type 11**

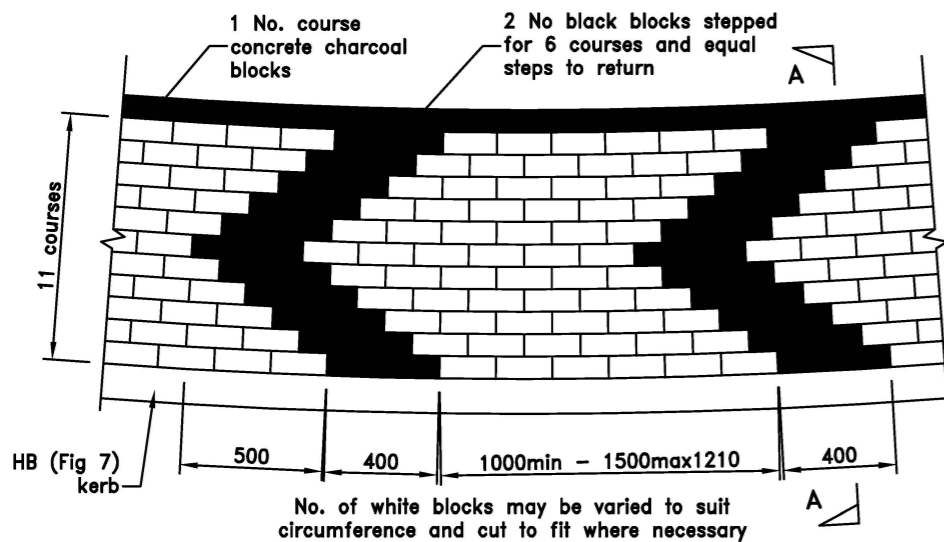

**PLAN**

**CHEVRON PAVING DETAIL - Type 12**  
See Note 12

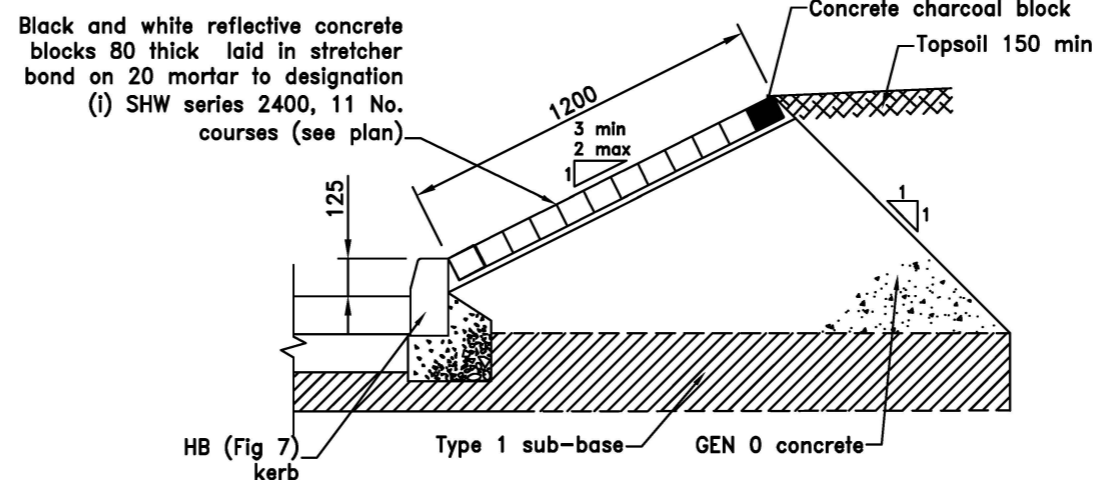

**SECTION A-A**

Do not scale this drawing

Rev	Date	Description	Checked
C	APR 19	Updated title block	NR
B	MAY 13	Drg renumbered from SD/1100/05A	KPT
A	MAR 11	Various minor amendments	KPT



Project

Title

STANDARD DRAWINGS

ROUNDABOUT CENTRAL ISLAND  
HARD LANDSCAPING

Drawing No.

**SD/1100/10C**

Scale NOT TO SCALE

Date MAY 04

Department of Place,  
Planning & Regeneration